

Product Highlights

Flexible operation and handling

- ★Ultra stable design greatly improves safety factor. Featuring compact body, and wide operating area
- ★Standard forklift hole, high equipment transportation turnover efficiency, and convenient transportation

Reduce maintenance costs

- ★High universality of components and no pressure on spare parts
- ★Drawer style door design for more convenient maintenance and upkeep
- ★Self diagnosis of faults, displaying fault information for rapid troubleshooting

More reliable performance

- ★Multiple protection for lifting circuit, safe and reliable
- ★Anti collision strip protection, more effective in preventing scratches and collisions



Standard Features

Maintenance free battery	Emergency stop button	Flash Light
Charge protection system	Non-braking brake tires	
Level Bubble	Emergency lowering down	
AC power to platform	Forklift and lifting holes	
Platform self-lock door	Buzzer	
charging indicator	Safety Support Bar	


Options Features

Power socket to platform	Electrophoretic coating process
--------------------------	---------------------------------



XEM-MINI SERIES
XEM50MINI
MOBILE ELECTRIC SCISSOR LIFT

Model	XEM50MINI	
Dimension	Metric	Imperial
A Max. Working Height	5m	16ft 5in
Max. Platform Height	3m	9ft 10in
C Length Stowed	1.25m	4ft 1in
D Width Stowed	0.76m	2ft 6in
E Height Stowed (guardrails unfolded)	1.85m	6ft 1in
F Wheelbase	1.07m	3ft 6in
H Ground Clearance	0.06m	0ft 2in
Platform Size(L×W×H)	1.15m*0.76m*1.1m	45in×30in×43in
Skirting Board Height	0.15m	0ft 6in
Performance		
Max. Load number	2 pers	2 pers
Lifting Capacity	240kg	529 lb
Rising Time	28s	28s
Lowering Time	24s	24s
Tire Specification/ Type	Non-marking Tires 150mm	Non-marking Tires 6in
Power		
Power Unit Motor (voltage/power)	12V/0.8kw	12V/0.8kw
Hydraulic Tank Capacity	2L	0.5 gal
Battery Specifications	114Ah	114Ah
Control Voltage	12V	12V
Charger (Input Voltage/Output Current)	96-265V/15A	96-265V/15A
Weight		
Weight	480kg	1058lb
Standard	GB/CE	GB/CE

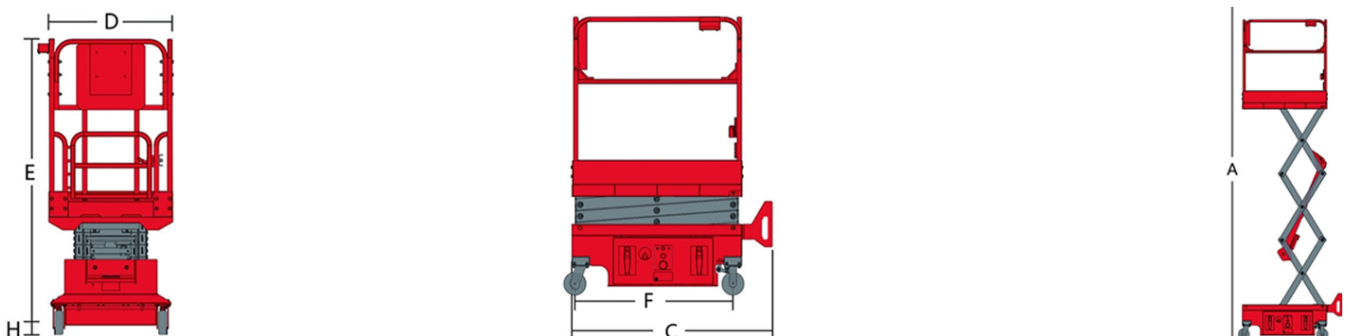

The images in this manual are for illustration only, and all copyrights belong to our company. Due to continuous technological updates, product parameters may change without prior notice.



XEM50MINI

Mantall 美通 XEM50MINI

www.mantall.com